

**HD4.6.8.10
108X2型
三滴制瓶机**



Models HD4、6、8、10-108X2 I.S. TG Machines

山东三金玻璃机械股份有限公司
Shandong Sanjin Glass Machinery Co., Ltd

HD4.6.8.10-108X2型三滴制瓶机配置表

内容 Content			工艺 Process	单位Unit	吹-吹法	压-吹法
制品范围 Container Limaits						
瓶身最大直径 Max Body Diameter				mm	90	
瓶口以下最大高度 Max High under Finish				mm	287	268
瓶口最大直径 Max Finish Diameter				mm	48	90
技术参数 Technical Data						
滴料中心距 Gob C.D.				mm	89	
模具中心距 Mould C.D.				mm	108	
压缩空气压力 Compressed		低压 Low Pressure		Mpa	0.21	
		高压 High Pressure			0.31	
压缩空气耗量/组 Compressed Air Consumption		低压 Low Pressure		M³/min	1	
		高 压 High Pressure	吹-吹法 Blow & Blow		3.7	
			压-吹法		4.8	
真空压力 Vacuum Pressure				Mpa	0.085	
真空耗量 Vacuum Consumption/组				M³/min	1.3	
冷却风压力 Cooling Wind Pressure				Mpa	0.0098	
冷却风耗量 Cooling Wind Consumption/组				M³/min	107	
冷却水压力 Cooling Water Pressure				Mpa	0.21	
冷却水耗量 Cooling Water Consumption				L/min	15	
冷却水硬度 Cooling Water Hardness				Mg/L	1升水含CaO<60 1Liter Contains CaO<60	
润滑油最大压力 Max Lubrication Oil Pressure				Mpa	8	
润滑油耗量 Lubrication Oil Consumption				L/d	1.3	

山东三金玻璃机械股份有限公司

Shandong Sanjin Glass Machinery Co., Ltd

地址：山东省淄博市周村区兴鲁大道577号


TEL: 0533-6166158 6182721

FAX: 0533-6181718 6187508

Website: www.sanjinglass.com

E-mail: sales@sanjinglass.com

HD4.6.8.10-108X2型三滴制瓶机

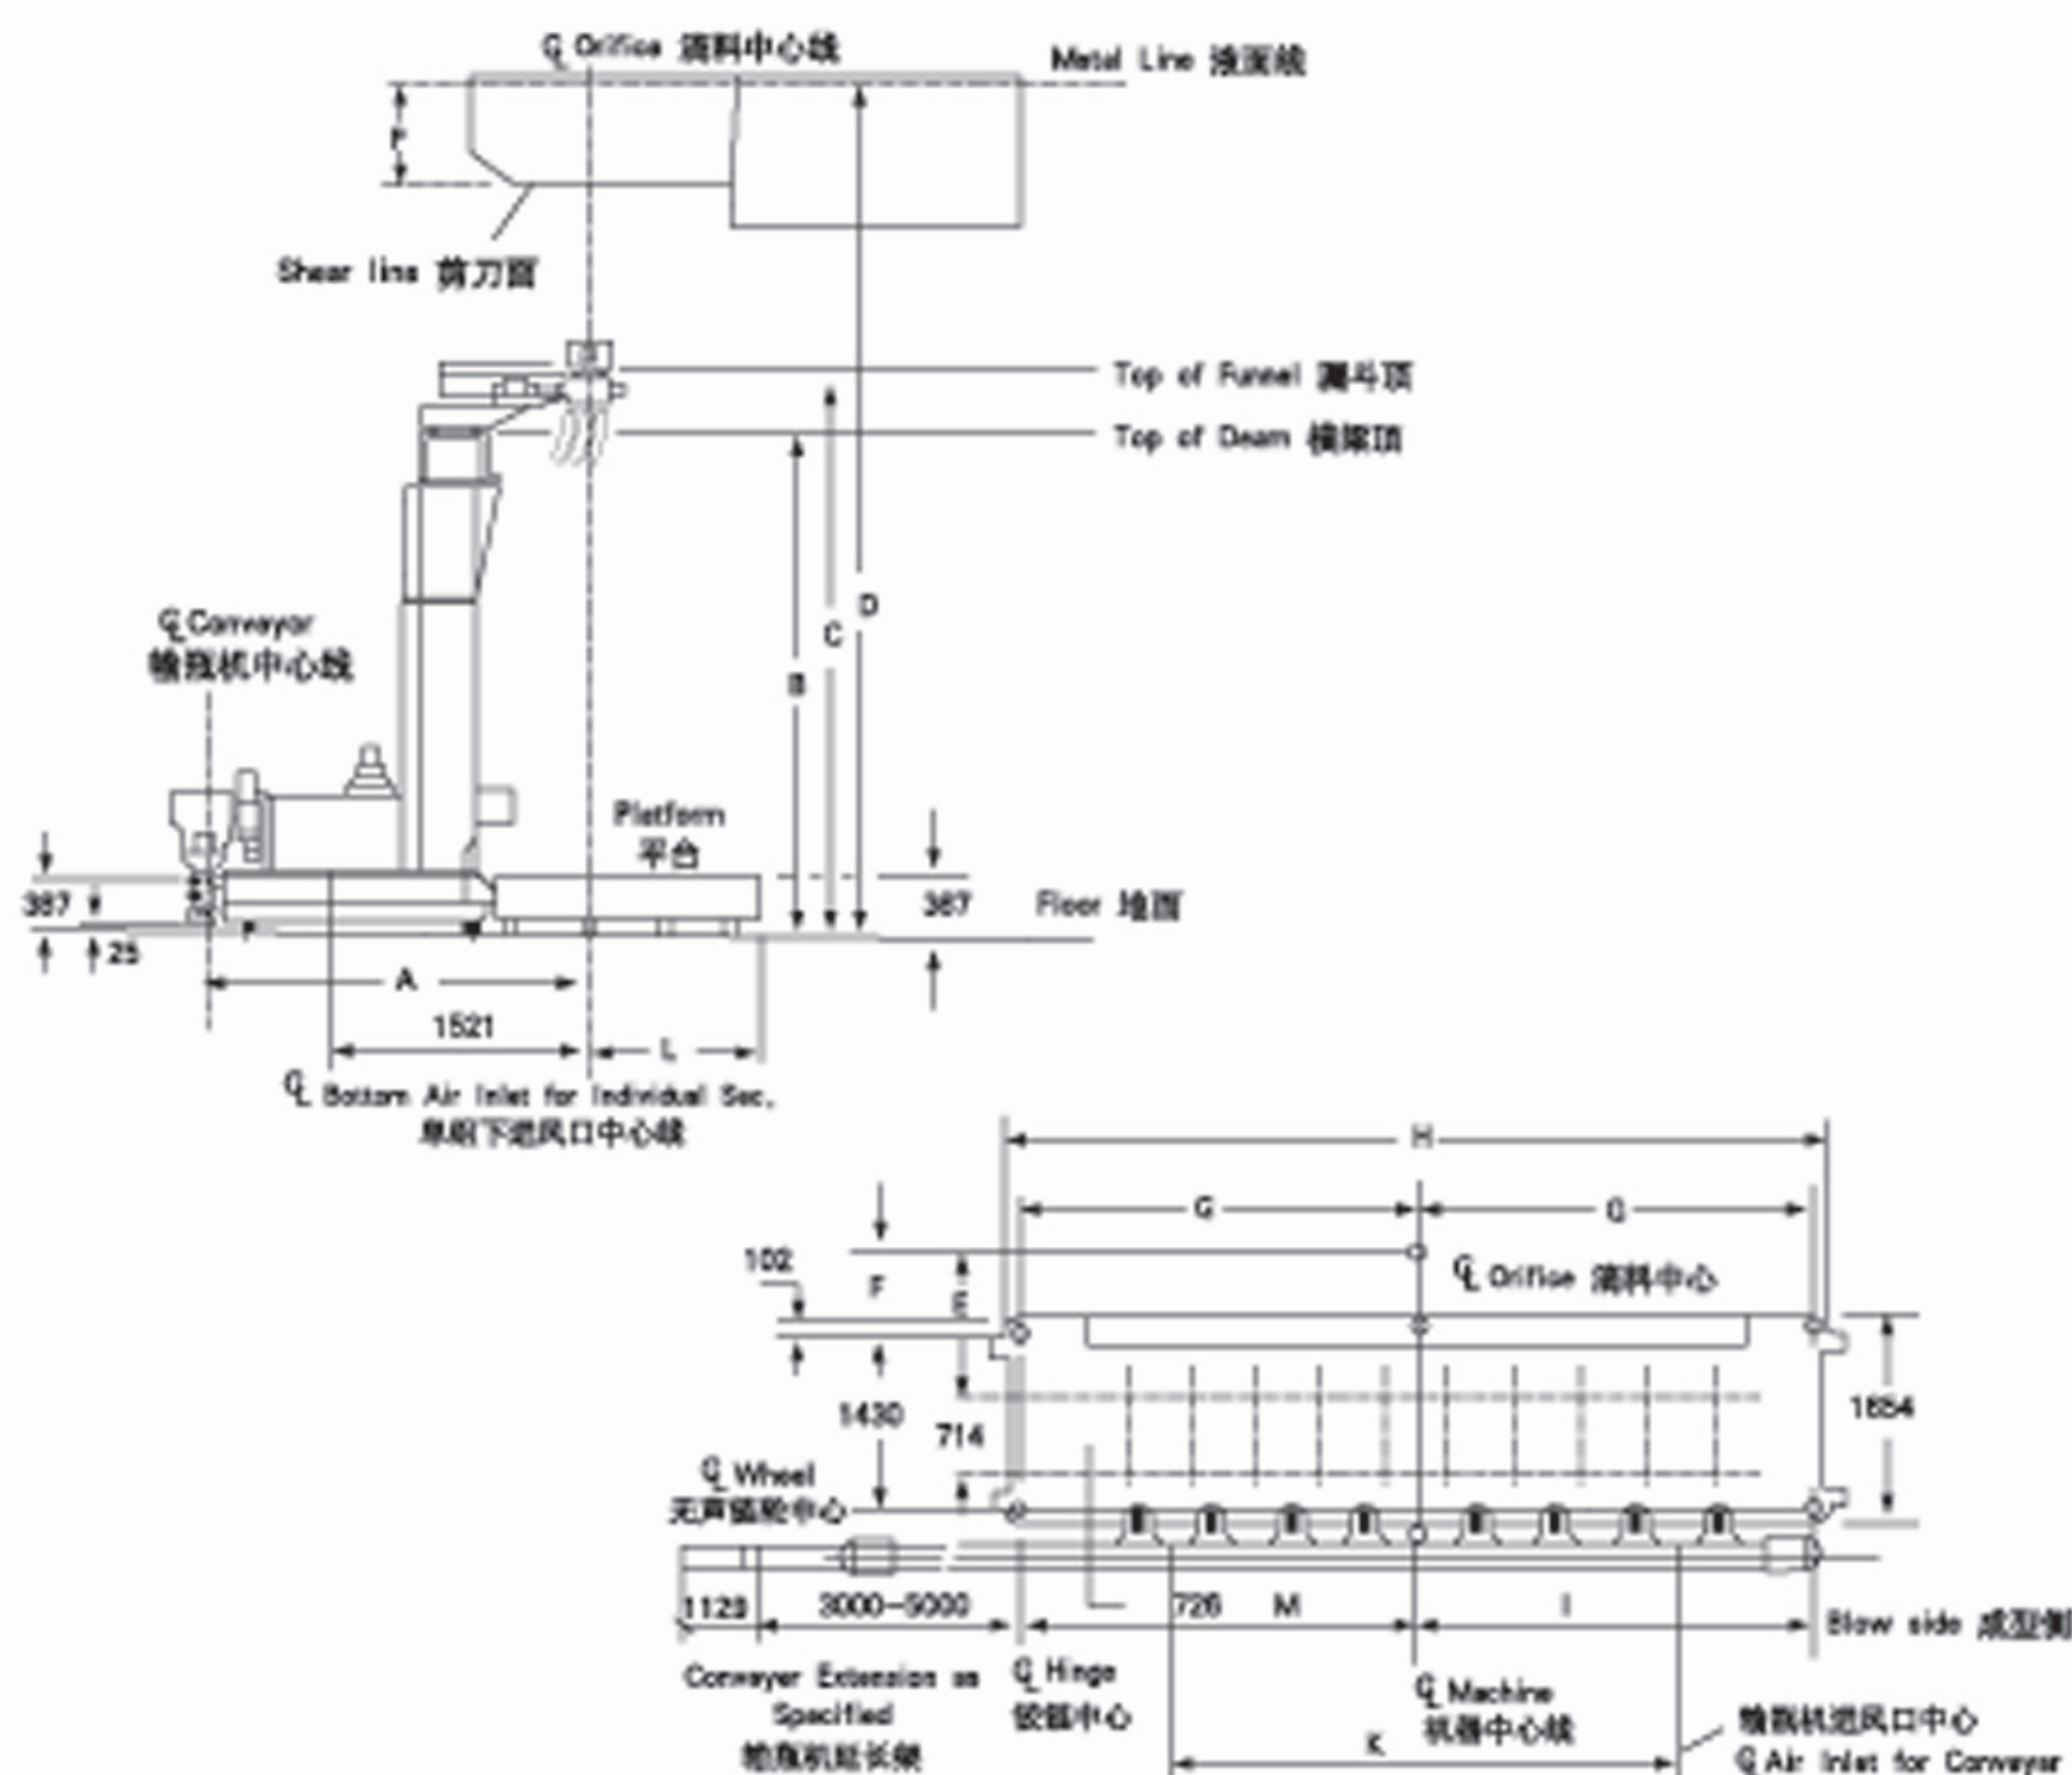

尺寸 Dimension	组数 sec	4	6	8	10
		mm	mm	mm	mm
A		2608	2608	2608	2608
B		3369	3369	3369	3602
C		3851	3851	3851	4043
D		5500	5500	5500	5700
E		1168	1168	1168	1168
F		587	587	587	587
G		1730	2264	2798	3866
H		3660	4828	5796	6964
I		1716	2250	2784	3318
L		1402	1402	1402	1402
K		2168	3236	4304	—
M		2292	2826	3360	3894
机器重量 Machine weight		17T	23T	29T	48T

HD4.6.8.10-108X2型三滴制瓶机配置表

机构特点 Mech. Features	型号 Model	HD4.6.8.10-108X2
26路电气阀箱 26 Events Electric and pneumatic valve block		★
伺服翻转机构 Servo Invert Mechanism		★
成型模垂直冷却机构 Blow mould verti-flow		★
快换压吹机构, 新型小口瓶装置 Quick Change plunger Mechanism, New Quick Change cartridge		★
快换漏斗臂、快换扑气臂、快换正吹气臂 Quick Change funnel arm, baffle arm, and final blow arm		★
双进气漏斗机构、平行移动式扑气机构 The double air-in funnel, the parallelism move baffle mechanism		★
伺服钳瓶机构 Servo take-out		★
齿形链悬臂 The tooth chain cantilever		★
快换钳瓶夹具 Quick Change take-out tong		★
初型模垂直冷却 Blank mould verti-flow cooling		★
悬挂式分体送料系统 气垫式接料槽 Lift type separate delivery, air pad scoops.		★
同步带伺服分料器 带漏斗导向 Synchronously belt servo gob distributor with funnel guide		★
双电机电子拨瓶器 The double motor electronic pusher		★
齿形链输瓶机 The tooth chain conveyor		★
三滴、双滴 (159型) 互换功能 Exchangeable with Q.G, D.G. (159 type)		★
多轴伺服制瓶机智能控制系统 Intelligent control system of the multi shafts servo I.S. machine		★